




The multi-chambered design of the Liniar profile makes it far more energy efficient than other PVC window systems.

Made from lead-free, fully recyclable uPVC, Liniar windows and doors offer many benefits for installers and end users, designed as they were with the wisdom of over 500 years of industry experience.





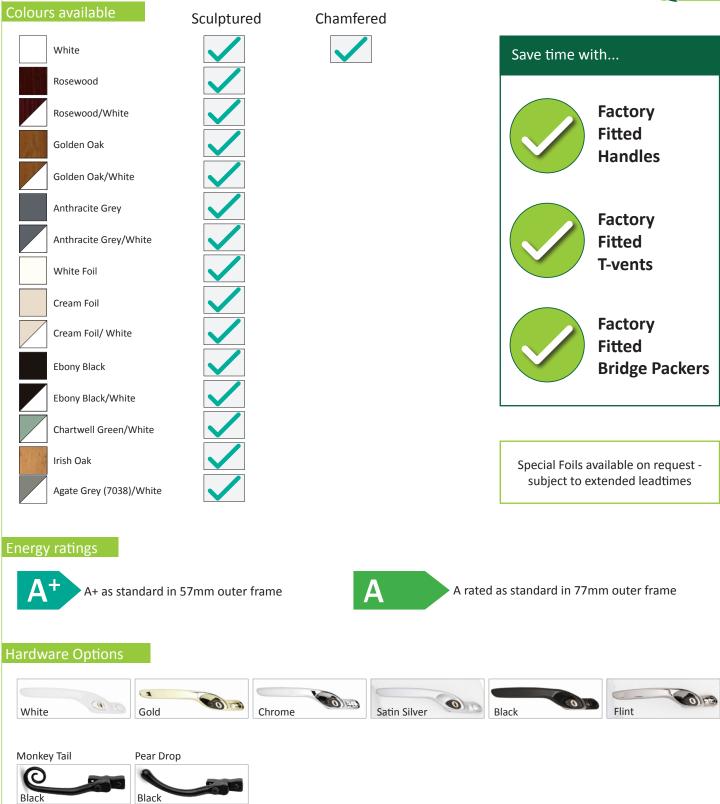

Glass Specifications

Outer Frame	Rating & U Value	Thickness	Glass Spec
57mm	A+ 10 Rated - 1.3 U Value	28mm Double Glazed	Float Warm Edge Argon Planitherm Total +
77mm	A Rated - 1.3 U Value	28mm Double Glazed	Float Warm Edge Argon Planitherm Total +
57mm	A+ 21 Rated - 0.9 U Value	40mm Triple Glazed	Float Warm Edge Argon Planitherm Total + (x2)
77mm	A+ 14 Rated - 1.0 U Value	40mm Triple Glazed	Float Warm Edge Argon Planitherm Total + (x2)

Standard Spec


Kenrick High Security locks with bi-directional claw window locking Egress easy clean friction stays





57

20mm structural coupler

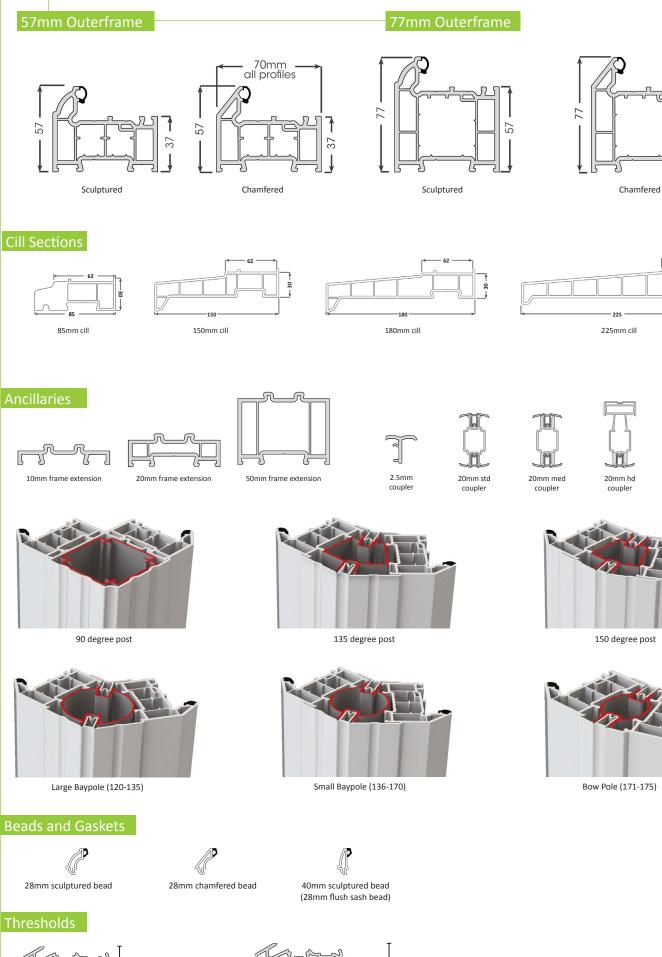

30mm aluminium low threshold *


30mm aluminium low threshold * (use with or without cill)



30mm aluminium + full tray * (use without cill)

US 5 70mm

Part M Threshold * (use with or without cill)

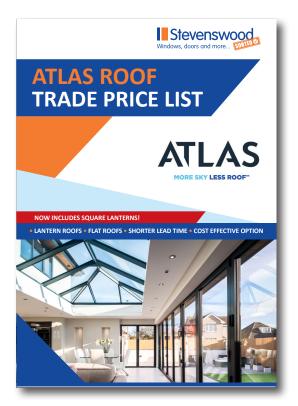

Pick up the Stevenswood Atlas Price List.

Available in branch or online!

There are plenty of ways to get social with us and keep up to date with all the news, views and helpful information...



All the information in this guide is provided for guidance only and is given in good faith, but without warranty or guarantee of any kind, whether implied or expressed. Our policy is to continually improve products, therefore methods, materials and changes of specification may be made from time to time without prior notice. Colour samples printed in this guide should only be used as a guide and are as accurate as our printing process allows.

Please visit our website to find your local trade counter.