

REAL Aluminium offers a comprehensive range of aluminium fenestration products for all domestic installations.

With strong, slim profiles, long lasting quality materials and finish, the REAL Aluminium range covers a full suite of aluminium products. That includes: casement windows, bi-folding doors, sliding doors, residential doors, composite doors, and ultra slim glazed roof solutions.





Full White

Full Black

Full Anthracite Grey

Anthracite Grey/White

Contemporary



Full White

Full Black

Full Anthracite Grey

Anthracite Grey/White

Classic-al



Antique Black

Ø

White


ardw	/are	Options				THE PARTY OF			To the same of		
				White	Black	Grey	Graphite	Chrome	Satin Silver	Polished Gold	_
		Main handle (Lever (straight) handle)	-	Ø	Ø	Ø		Ø	Ø	Ø	
		Intermediate handle	A								
	BI-FOLDING DOORS	D handle	0	Ø	0	Ø					
	Magnetic catch		Ø	Ø	Ø		Ø				
		Trickle vents		Ø	Ø	Ø			Ø		
SLIDING PATIO DOORS	Long lever handle	Ą	Ø	Ø	Ø			∅.			
	ORS	Sliding Door D Handle	D	Ø	Ø	Ø			Ø		
CASEMENT	MENT	Offset handle	p ^a	Ø	Ø	Ø	Ø	Ø	Ø	Ø	
WINE	WINDOWS	Monkey tail handle	1								
COMPOSITE, ENTRANCE & FRENCH DOORS		Lever (straight) handle	-								
		Lever (swan) handle	1								
		Letterplate (black ABS surround)		Ø	Ø			Ø	Ø	•	
		Letterplate (matching surround)		Ø	0		Ø	Ø	Ø	•	
	ENCH	Knocker Victorian 6" Urn	\$	•	Ø		Ø	Ø	Ø	Ø	
		Knocker Victorian 6" Urn with spyhol	e 🖕	•	Ø		Ø	Ø	Ø	Ø	
		Knocker Victorian 8" Urn Slimline	*	Ø	Ø		Ø	Ø	Ø	Ø	
		Knocker Victorian 8" Urn Slimline with spyhole	•	Ø	Ø		Ø		•	Ø	
	Knocker Ponytall	2	Ø	Ø		Ø	Ø	Ø	Ø		
		Numerals 0-9	1		Ø		Ø		•	Ø	

A range of locking cylinders are available to give enhanced security. Please speak to your REAL Retailer for details.


Glass spec	Double-glazed unit - 28mm/Softcoat/Argon/Superspacer				Triple-glazed unit - 36mm/32mm/Softcoat/Argon/Superspacer			
Std/Low-iron	Float		Low-iron		Float		Low-iron	
Glass centre pane U-Value	1.2		1.2		0.8 (36mm) 0.9 (32mm)		0.8 (36mm) 0.9 (32mm)	
Glass solar gain factor	0.71		0.74		0.62		0.64	
Window/Door Product	WER/DER	U-Value	WER/DER	U-Value	WER/DER	U-Value	WER/DER	U-Value
Window System 1	B (-4)	1.6	A (+1)	1.6	n/a	n/a	n/a	n/a
Window System 2	B (-3)	1.6	A (+1)	1.6	A (+0)	1.4 (36mm)	A (+3)	1.4 (36mm)
Window System 5	B (-2)	1.6	A (+2)	1.6	B (-0)	1.4 (36mm)	A (+3)	1.4 (36mm)
Visofold Bifold Doors	n/a	1.7	n/a	1.7	n/a	1.4 (36mm)	n/a	1.4 (36mm)
Visoglide Patio Doors	n/a	1.8	n/a	1.8	n/a	1.4 (36mm)	n/a	1.4 (36mm)
Alitherm Plus Doors - open in	E	1.8	Е	1.8	С	1.5 (32mm)	С	1.5 (32mm)
Alitherm Plus Doors - open out	Е	1.9	Е	1.9	С	1.6 (32mm)	С	1.6 (32mm)

ETC371 28mm Glazing 26 ETC376 36mm Glazing 70 **ZSB 169** Outer Frame 36 **ETC375** 28mm Glazing **ETC376** 36mm Glazing 70 **ZSB168** Outer Frame Threshold ETC161 ECZ65 Insert ETC164 28mm Glazing Classic-al Contemporary **ETD017** ETD096 Low Threshold ETD015 Outer Frame Outer Frame UG050 PVC Infill UG050 VG510 VG511 VG560 Two Track Outer Frame Two Track Outer Frame with Internal Upstand 28mm Glazing 52 ij Visofold Bifolding Door Main Frame 77.5 77.5 77.5 DV174 Low threshold ramp DV14N DV171 **DV271 DV173** Outer Frame Low threshold, open in Low threshold, open out ETC178 ETC157N ETC158N ETC179

Bi-folding Door Configurations

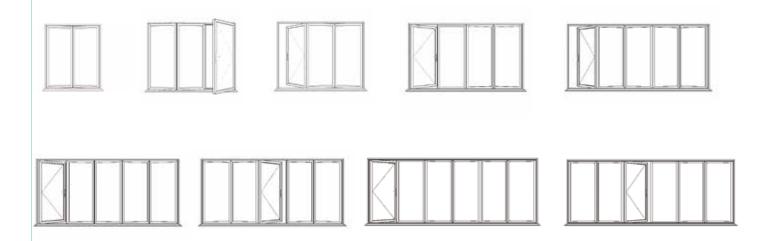

Sliding Door Configurations

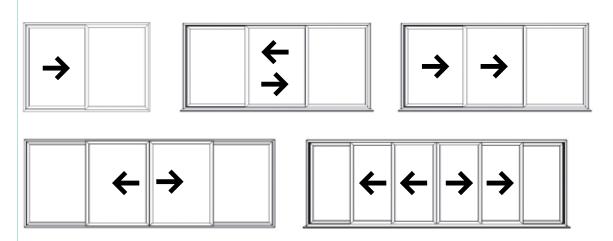

There are plenty of ways to get social with us and keep up to date with all the news, views and helpful information...







All the information in this guide is provided for guidance only and is given in good faith, but without warranty or guarantee of any kind, whether implied or expressed.

Our policy is to continually improve products, therefore methods, materials and changes of specification may be made from time to time without prior notice.

Colour samples printed in this guide should only be used as a guide and are as accurate as our printing process allows.

Please visit our website to find your local trade counter.